



Manufacturing Attractive Bird Products


71024 Co. Rd. 13 Nappanee, IN 46550 • Toll Free (866) 546-0423
(574) 773-4975 • FAX (574) 773-7282

T-14 Wooden Pole Quick Release Pole Guard


To maximize its effectiveness, mount the pole guard as high as possible above the ground. In most situations, the top of the guard should be at least 4 feet above the ground. The Quick Release Pole Guard is designed for mounting above the winch.

Mounting Instructions


- STEP 1:** Attach the two pole clamps at least 4 feet above the ground using the two 1/4"x 5" bolts with the one 1/4" lock nut and 1/4" wing nut. Make sure the mounting clamps are parallel to the ground and each other.
- STEP 2:** Unlatch the top of the aluminum tube. Place two slider plates on the built-in plate, positioning each slider over the predrilled holes. Put the 3/8" bolt through a washer then insert through the slider plate and top plate. Thread a small nut onto each bolt finger tightening each slider plate so the slider can adjust to the pole.
- STEP 3:** Slip the tube around the pole above the pole clamps and position so that the cable runs in the v-notch with rubberized edges. Fasten the latch on top of the pole guard. Push the slider plates so that they are snug against the pole and tighten the small bolts.
- STEP 4:** Insert the locking pin through the holes in the rods that extend downward from the bottom of the pole guard. Push the hitch pin through the hole in the locking pin.

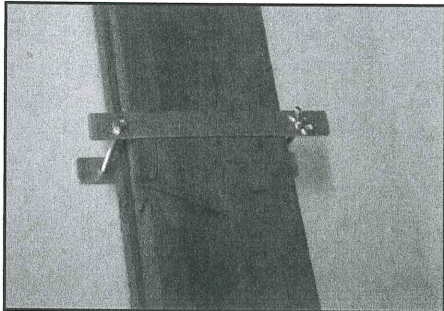


Step 1

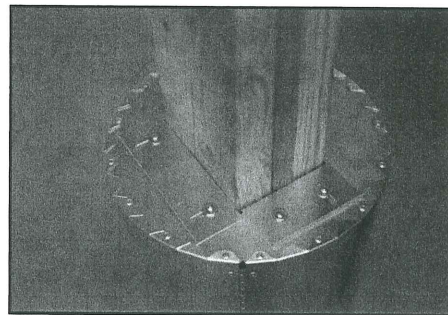

Step 3

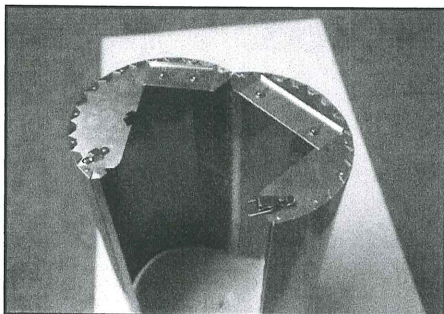

Step 2

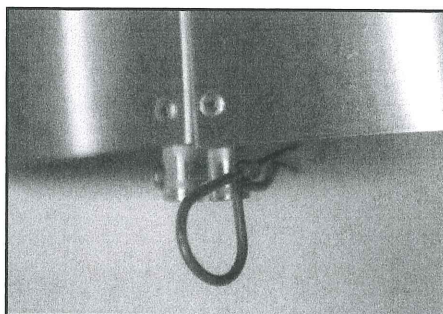

Step 4

Removing and Reattaching the Pole Guard

STEP 1: Remove the hitch pin and locking pin at the bottom of the pole guard.

STEP 2: Unlatch the top and remove the pole guard from the pole.

STEP 3: Loosen the wing nut on the pole clamps. Do not loosen the lock nut. By loosening the wing nut, the pole clamp will slide down to the winch. This will allow you to lower your T-14 down to the desired height.

STEP 4: To reattach the pole guard, slide the pole clamps back up to the desired height. Tighten the wing nut, making sure the pole clamp is parallel to the ground and to each other.

STEP 5: Slip the tube around the pole above the pole clamps and position so that the cable runs in the v-notch with rubberized edges. Fasten the latch on top of the pole guard.

STEP 6: Insert the locking pin through the holes in the rods that extend downward from the bottom of the pole guard. Push the hitch pin through the holes in the locking pin.

Please Note: In areas of the country with large snakes, a net trap may be needed in addition to a pole guard. Wrap and secure "bird netting" around the pole above the pole guard. This pole guard is designed to wobble when touched by a pole climbing predator. This movement, along with its slipperiness, makes it twice as effective. Please wax your guard at least annually to keep it slippery.